



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 064 895 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
03.01.2001 Bulletin 2001/01

(51) Int. Cl.⁷: A61F 13/15

(21) Application number: 00305450.9

(22) Date of filing: 29.06.2000

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 30.06.1999 JP 18666099

(71) Applicant: UNI-CHARM CORPORATION
Kawanoe-shi Ehime-ken (JP)

(72) Inventors:

- Nishima, Yoshitaka,
c/o Technical Center
Mitoyo-gun, Kagawa-ken 769-1602 (JP)
- Satama, Yasushi,
c/o Technical Center
Mitoyo-gun, Kagawa-ken 769-1602 (JP)


(74) Representative:

**Parry, Christopher Stephen
Saunders & Dolleymore,
9 Rickmansworth Road
Watford, Herts. WD18 0JU (GB)**

(54) Disposable diaper

(57) Here is disclosed a disposable diaper improved to be easily put on the wearer. Top- and backsheets 2, 3 in front and rear waist regions 6, 7 of the diaper 1 includes the top- and backsheets 2, 3 that have an elastic stretchability transversely of the diaper 1, and transversely opposite side edges 9, 9 of the diaper 1 includes top- and backsheets 22, 23 intended to surround the wearer's legs having elastic stretchability longitudinally and transversely of the diaper 1.

FIG. I

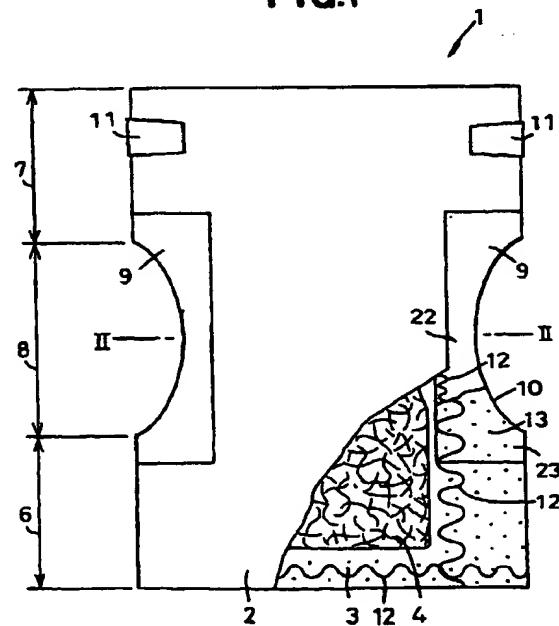

Description

[0001] This invention relates to a disposable diaper for absorbing and containing body wastes.

[0002] It is well known to use an elastically non-stretchable nonwoven fabric or a plastic film as stock materials for top- and backsheets of a disposable diaper and to provide the diaper along peripheral edges of the waist-opening and the leg-openings with elastic members secured under an appropriate tension to the diaper so that gathers may be formed along these peripheral edges and as the elastic members contract and thereby ensure a good fit of the diaper around the waist and the legs of the wearer.

[0003] The diaper of prior art is normally in its shranked state under contraction of the elastic members and immediately before the diaper is put on the wearer, much time and trouble are required to stretch the gathers so that the waist-opening as well as the leg-openings may be sufficiently widened to facilitate the diaper to be put on the wearer. The diaper of prior art is inconvenient also in that the diaper put on the wearer is not necessarily able to follow complex movements and therefore apt to slip down or to be twisted. This is for the reason that the diaper is stretchable only in the direction along which the elastic members extend.

[0004] It is an object of this invention to provide a disposable diaper improved so that time and trouble to stretch the gathers otherwise taken to put the diaper on the wearer may be eliminated and the diaper may follow a movement of the wearer as closely as possible.

[0005] According to this invention, there is provided a disposable diaper comprising a topsheet intended to come in contact with the wearer's skin, a backsheet intended to come in contact with the wearer's garment and an absorbent core disposed between the topsheet and the backsheet wherein, the diaper has a front waist region, a rear waist region and a crotch region extending between the waist regions so that transversely opposite side edges of the crotch region surround the wearer's legs, wherein:

the topsheet and the backsheet in the front and rear waist regions are elastically stretchable in a transverse direction of the diaper while the topsheet and the backsheet at the transversely opposite side edges of the crotch region are elastically stretchable in a longitudinal direction of the diaper and in the transverse direction and the topsheet and the backsheet in the remaining regions are elastically stretchable at least in the transverse direction.

[0006] The disposable diaper according to this invention has no gathers and facilitates the diaper to be put on the wearer. The diaper according to this invention does not obstruct a movement of the wearer's legs and crotch region because the regions around the legs as well as the crotch region of the diaper are elastically

stretchable longitudinally and transversely of the diaper.

Fig. 1 is a partially cutaway plan view showing a disposable diaper according to a principle of this invention;

Fig. 2 is a sectional view taken along line II - II in Fig. 1;

Fig. 3 is a view similar to Fig. 2 but showing another embodiment of this invention;

Fig. 4 is a view similar to Fig. 1 but showing still another embodiment of this invention; and

Fig. 5 is a sectional view taken along line V - V in Fig. 4.

[0007] Details of a disposable diaper according to this invention will be more fully understood from the description given hereunder with reference to the accompanying drawings.

[0008] Fig. 1 is a partially cutaway plan view showing a disposable diaper 1 and Fig. 2 is a sectional view taken along line II - II in Fig. 1. The diaper 1 comprises a liquid-pervious topsheet 2 intended to come in contact with the wearer's skin, a liquid-impervious backsheet 3 intended to come in contact with the wearer's garment and a liquid-absorbent core 4 disposed between these two sheets 2, 3. Longitudinally, the diaper 1 has a front waist region 6, a rear waist region 7 and a crotch region 8 extending between these two waist regions 6, 7. The crotch region 8 has its transversely opposite side edges 9, 9 partially cut away to form curved edges 10, 10 adapted to fit around the wearer's legs. The rear waist region 7 is provided on its transversely opposite side edges with tape fasteners 11, 11, respectively. The top- and backsheets 2, 3 are placed upon and joined to each other by means of hot melt adhesive 12 along their portions extending outward beyond a peripheral edge of the core 4.

[0009] In such diaper 1, both the top- and backsheets 2, 3 are elastically stretchable in the transverse direction which is orthogonal to the longitudinal direction of the diaper 1. It should be understood here that, in the vicinity of the side edges 9, 9 of the crotch region 8, the top- and backsheets 2, 3 are partially cut away and these portions of the sheets 2, 3 thus cut away are replaced by separate top- and backsheets 22, 23 both associated with the leg-openings. These top- and backsheets 22, 23 are elastically stretchable longitudinally as well as transversely of the diaper 1. The topsheet 22 associated with the leg-openings is preferably sweat-absorbent and breathable while said backsheet 23 associated with the leg-openings is preferably breathable and liquid-impervious. These top- and backsheets 22, 23 are bonded to the respective inner surfaces of the top- and backsheet 2, 3, for example, by means of hot melt adhesive 12 applied thereon in a pattern of sine curves. The top- and backsheets 22, 23 associated with the leg-openings are also placed upon and joined to each other by means of hot melt adhesive 13 applied

thereon in a pattern of sine curves or small dots (See Fig. 1).

[0010] The diaper 1 can be put on the wearer merely by unfolding it as seen in Fig. 1. This diaper 1 is free from the gathers as in the conventional diaper and therefore can be put on the wearer immediately after the diaper 1 has been unfolded without time and trouble taken to stretch the gathers. The top- and backsheets 2, 3 may be circumferentially stretched to put the diaper 1 on the wearer with a good fit. The diaper 1 put on the wearer does not obstruct a movement of baby's legs because the portion of diaper 1 extending around the wearer's legs is free to be stretched in all directions.

[0011] Fig. 3 is a view similar to Fig. 2 but showing another embodiment of this invention. According to this embodiment of diaper 1, the crotch region 8 is provided along each of its side edges 9 with a single sheet 25 associated with the leg-opening bonded to the respective inner surfaces of the top- and backsheets 2, 3 by means of hot melt adhesive 12, 13. This single sheet 25 associated with the leg-opening serves both as the top- and backsheets 22, 23 associated with the leg-openings in the embodiment shown in Fig. 2.

[0012] Figs. 4 and 5 are respectively a view similar to Fig. 1 but showing still another embodiment of this invention and a sectional view taken along line V - V in Fig. 4. According to this embodiment of diaper 1, the topsheet 2 is divided into topsheet sections 2A, 2B for the front and rear waist regions and a topsheet section 2C for the crotch region. Similarly, the backsheet 3 is divided into backsheet sections 3A, 3B and a backsheet section 3C for the crotch region. The topsheet sections 2A, 2B for the front and rear waist regions as well as the backsheet sections 3A, 3B for the front and rear waist regions are elastically stretchable transversely of the diaper 1. The topsheet sections 2C, 3C for the crotch region are elastically stretchable longitudinally as well as transversely of the diaper 1. These sheet sections 2A - 2C and 3A - 3C are bonded one to another along their overlapping zones by means of hot melt adhesive 12, 13 applied thereto in a pattern of sine curves or small dots. Referring to Fig. 5, the core 4 may be appropriately joined to the respective inner surfaces of the top- and backsheet sections 2A - 2C and 3A - 3C in the front and rear waist regions 6, 7 and in the crotch region 8. Similarly to the diaper 1 of Fig. 1, the diaper 1 according to this embodiment also can be easily put on the wearer and the diaper 1 having been put on the wearer does not obstruct a movement of the wearer legs as well as the wearer's crotch.

[0013] To make the diaper 1 according to this invention, a nonwoven fabric or an elastomer film having a monoaxial stretchability can be used as stock material for the top- and backsheets or their sections 2, 2A, 2B, 3, 3A, 3B. Such nonwoven fabric or elastomer may be formed with a plurality of pores each having an appropriate size to obtain a desired liquid-pervious property. A nonwoven fabric or an elastomer having a biaxial

stretchability can be used as stock material for the top- and backsheet sections 22, 23 associated with the leg-openings, the single sheet 25 associated with each of the leg-openings and the top- and backsheet sections 2C, 3C of the crotch region. Bonding of such nonwoven fabric and film may be carried out using suitable adhesive agents such as hot melt adhesive or ultrasonic- or heat-sealing technique. It is important to perform operation of sheet-to-sheet bonding without deteriorating the original stretchability of these sheets. When adhesive agent is used, these sheets may be applied with adhesive agent in a pattern of sine curves to avoid an apprehensive deterioration of the sheets' original stretchability and at the same time to prevent the body fluids from flowing between the top- and backsheets 2, 3 from the core 4 toward the peripheral edge of the diaper 1.

Claims

- 5 1. A disposable diaper comprising a topsheet intended to come in contact with the wearer's skin, a backsheet intended to come in contact with wearer's garment and an absorbent core disposed between said topsheet and said backsheet wherein, said diaper has a front waist region, a rear waist region and a crotch region extending between said front and rear regions so that transversely opposite side edges or said crotch region surrounds the wearer's legs, wherein:
20
25
30
35
40
45
50
55
said topsheet and said backsheet in said front and rear waist regions are elastically stretchable in a transverse direction of said diaper while said topsheet and said backsheet at said transversely opposite side edges of said crotch region are elastically stretchable in a longitudinal direction of said diaper and in said transverse direction and said topsheet and said backsheet in the remaining regions are elastically stretchable at least in said transverse direction.
2. The diaper according to Claim 1, wherein said topsheet and said backsheet in substantially entire range of said crotch region are elastically stretchable in said longitudinal direction as well as in said transverse direction.
3. The diaper according to Claim 1, wherein said topsheet and said backsheet forming each of transversely opposite side edges of said crotch region are replaced by a single sheet having an elastic stretchability in said longitudinal direction and in said transverse direction.
4. The diaper according to Claim 1, wherein none of gathers is formed both in said front and rear waist

regions and said crotch region.

5

10

15

20

25

30

35

40

45

50

55

FIG.I

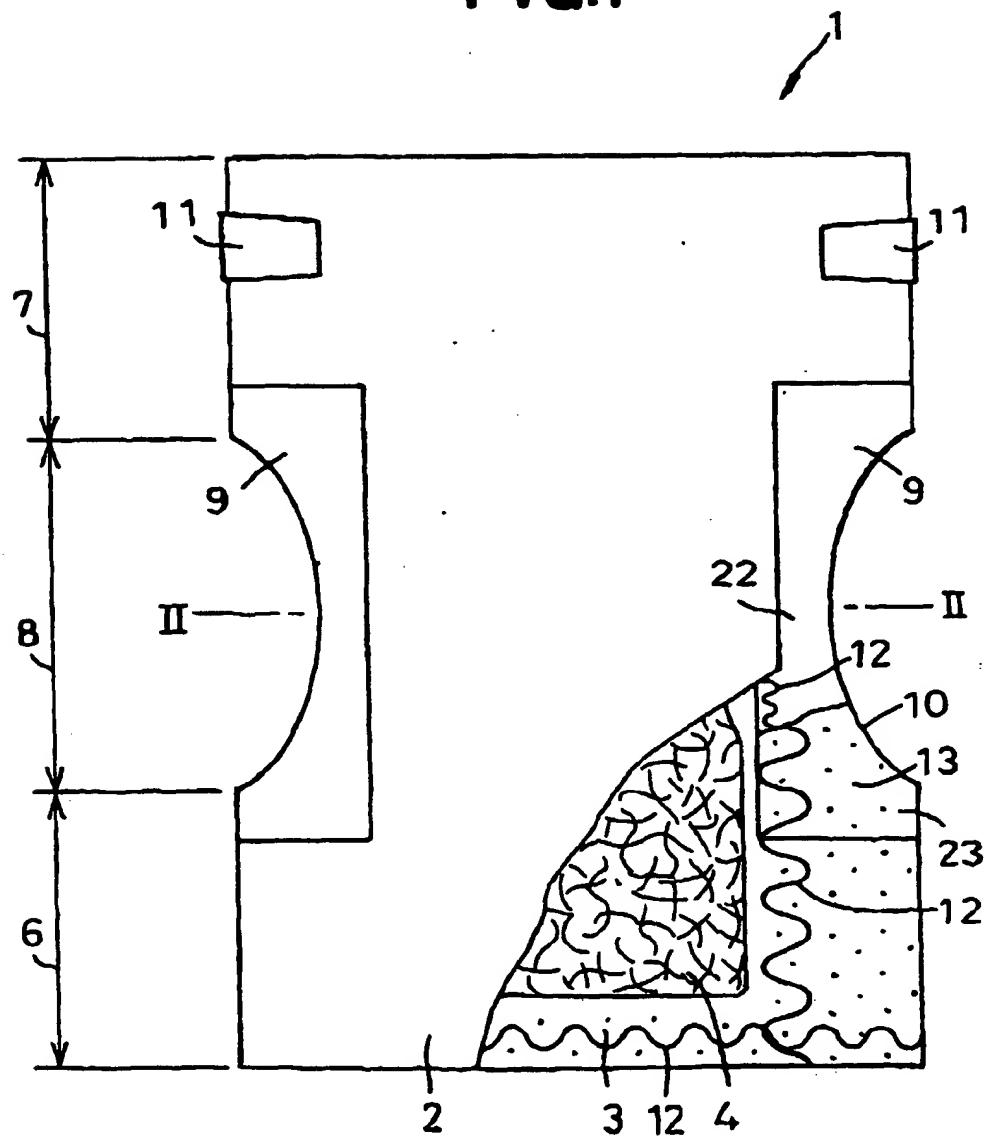


FIG.2

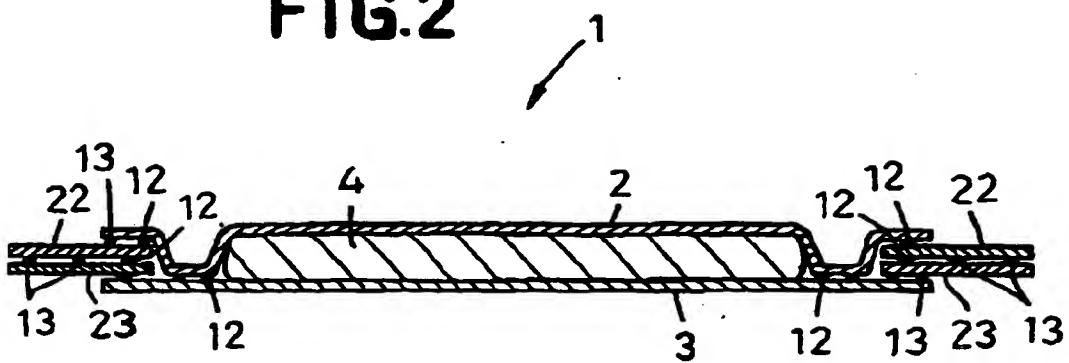


FIG.3

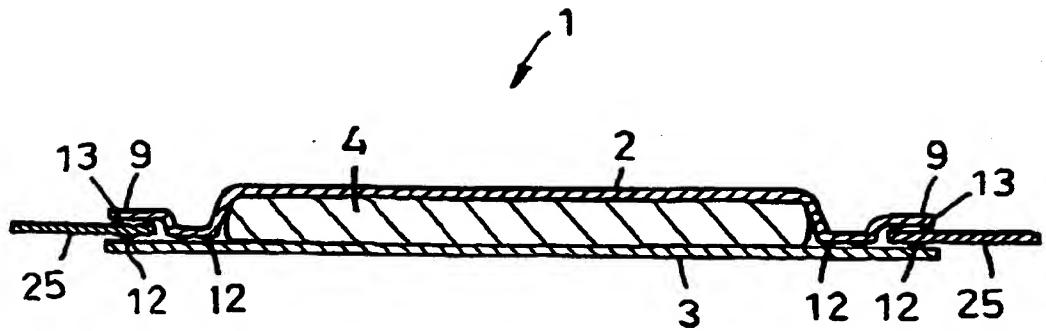


FIG.4


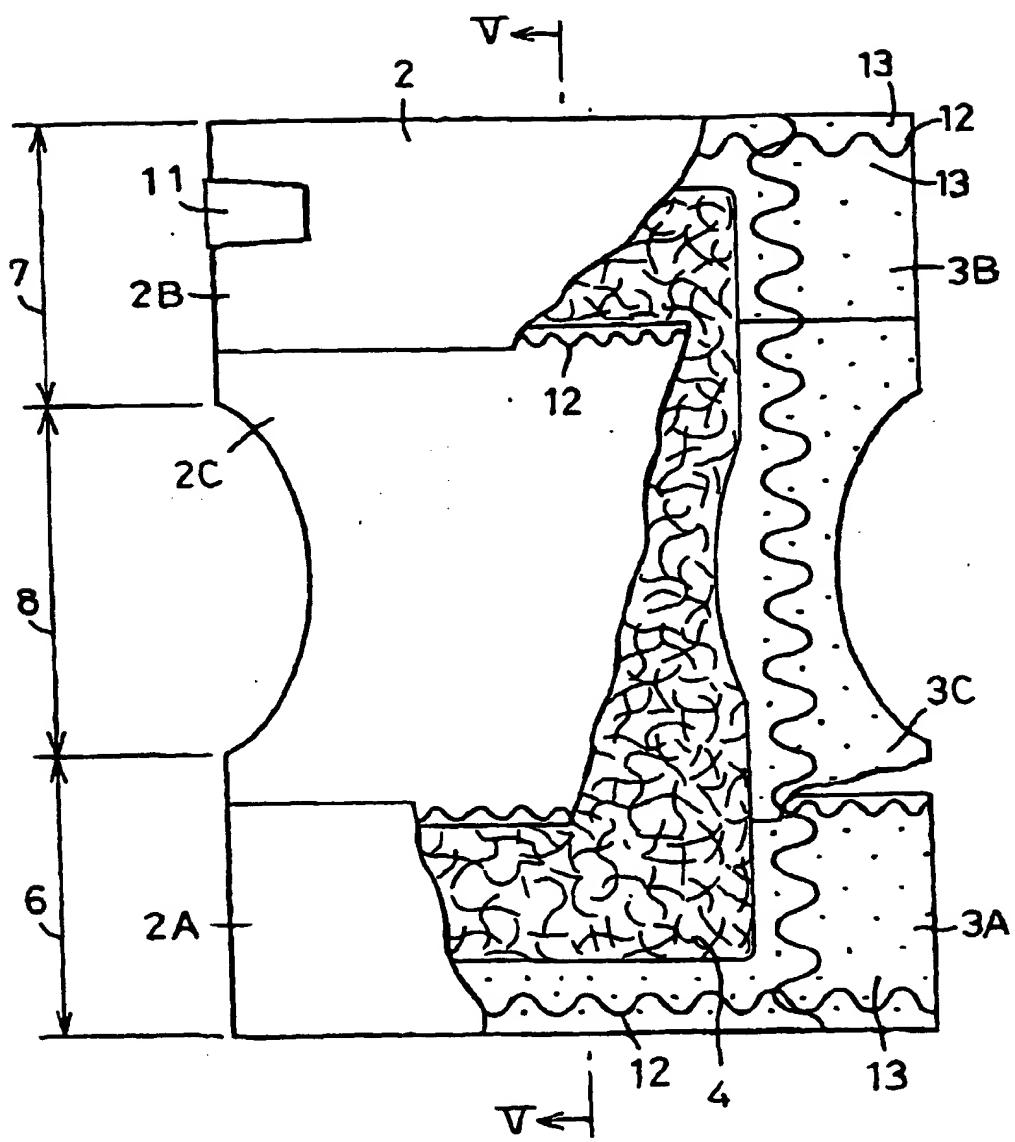


FIG.5





(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

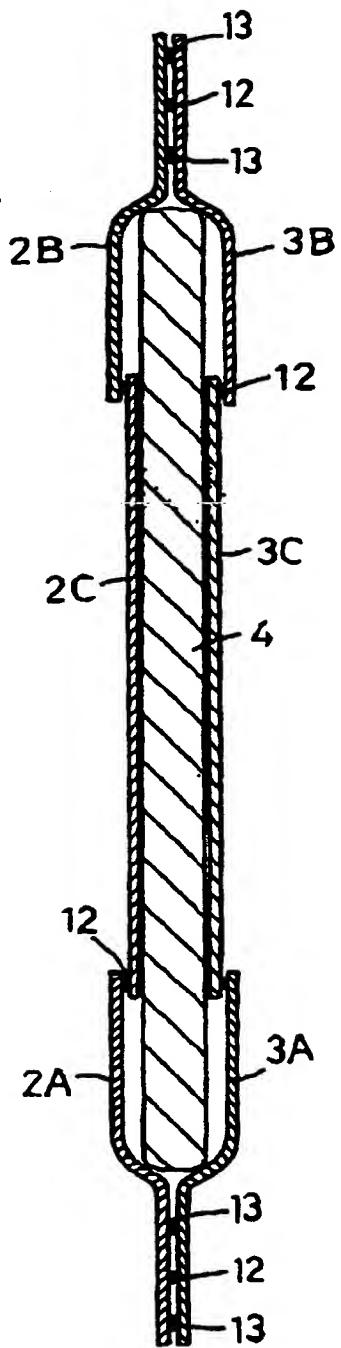

(11) EP 1 064 895 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
02.05.2001 Bulletin 2001/18

(51) Int. Cl.⁷: **A61F 13/15**

(43) Date of publication A2:
03.01.2001 Bulletin 2001/01

(21) Application number: **00305450.9**

(22) Date of filing: **29.06.2000**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE

Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **30.06.1999 JP 18666099**

(71) Applicant: **UNI-CHARM CORPORATION**
Kawanoe-shi Ehime-ken (JP)


(72) Inventors:
• Nishima, Yoshitaka,
c/o Technical Center
Mitoyo-gun, Kagawa-ken 769-1602 (JP)
• Satama, Yasushi,
c/o Technical Center
Mitoyo-gun, Kagawa-ken 769-1602 (JP)

(74) Representative:
Parry, Christopher Stephen
Saunders & Dolleymore,
9 Rickmansworth Road
Watford, Herts. WD18 0JU (GB)

(54) Disposable diaper

(57) Here is disclosed a disposable diaper improved to be easily put on the wearer. Top- and backsheets 2, 3 in front and rear waist regions 6, 7 of the diaper 1 includes the top- and backsheets 2, 3 that have an elastic stretchability transversely of the diaper 1, and transversely opposite side edges 9, 9 of the diaper 1 includes top- and backsheets 22, 23 intended to surround the wearer's legs having elastic stretchability longitudinally and transversely of the diaper 1.

FIG. I

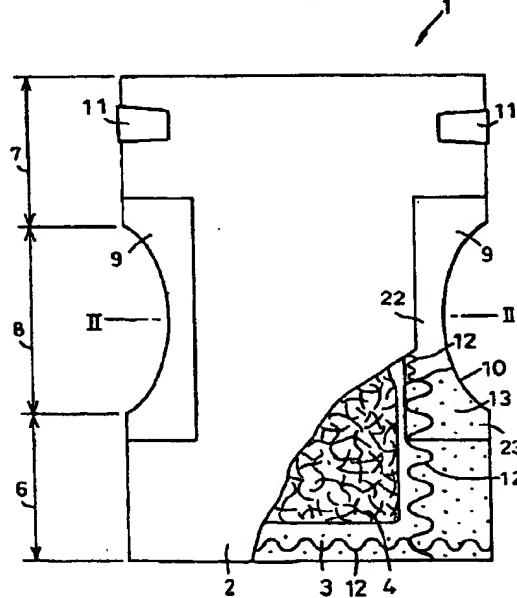

EP 1 064 895 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 5450

DOCUMENTS CONSIDERED TO BE RELEVANT		Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.)		
Category	Citation of document with indication, where appropriate, of relevant passages				
X	US 5 749 866 A (DREIER KIMBERLY ANN ET AL) 12 May 1998 (1998-05-12) * column 5, line 7 - line 35 * * column 30, line 31 - column 31, line 25; figures 1,18 *	1,2,4	A61F13/15		
A	WO 99 00095 A (PROCTER & GAMBLE) 7 January 1999 (1999-01-07) * page 7, line 25 - line 32; figure 1 *	1-3			
A	US 4 500 316 A (DAMICO JOYCE A) 19 February 1985 (1985-02-19) * column 5, line 29 - line 44; figure 2A *	1-3			
		TECHNICAL FIELDS SEARCHED (Int.Cl.)			
		A61F			
The present search report has been drawn up for all claims					
Place of search	Date of completion of the search	Examiner			
MUNICH	26 February 2001	Westermayer, W			
CATEGORY OF CITED DOCUMENTS					
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document					
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document					

EPO FORM 155 (02/92) (PC001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 5450

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on [REDACTED]. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-02-2001

Patent document cited in search report		Publication date		Patent family member(s)		Publication date	
US 5749866	A	12-05-1998		US 5569232 A US 5554145 A AU 700813 B AU 1746395 A BR 9506912 A CA 2182873 A CN 1144472 A CZ 9602469 A DE 69510923 D DE 69510923 T DK 748197 T EG 20605 A EP 0748197 A ES 2133741 T FI 963355 A GR 3030842 T HU 77402 A JP 9509350 T NO 963555 A SG 44635 A TR 28798 A WO 9522951 A US 5556394 A US 5554143 A US 5554144 A US 5947948 A ZA 9501648 A		29-10-1996 10-09-1996 14-01-1999 11-09-1995 16-09-1997 31-08-1995 05-03-1997 15-01-1997 26-08-1999 20-01-2000 29-11-1999 30-09-1999 18-12-1996 16-09-1999 28-08-1996 30-11-1999 28-04-1998 22-09-1997 25-10-1996 19-12-1997 25-03-1997 31-08-1995 17-09-1996 10-09-1996 10-09-1996 07-09-1999 13-11-1996	
WO 9900095	A	07-01-1999		AU 8178298 A BR 9810224 A CN 1267209 T EP 0994686 A		19-01-1999 08-08-2000 20-09-2000 26-04-2000	
US 4500316	A	19-02-1985		AU 566552 B AU 2852684 A BE 899794 A CA 1228953 A DE 3420288 A EP 0164435 A FR 2546745 A FR 2546745 B GB 2143115 A,B HK 50292 A IT 1179384 B JP 1822139 C JP 5022543 B		22-10-1987 06-12-1984 17-09-1984 10-11-1987 28-02-1985 18-12-1985 07-12-1984 13-07-1990 06-02-1985 17-07-1992 16-09-1987 10-02-1994 29-03-1993	

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 5450

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-02-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4500316 A		JP 60075055 A	27-04-1985
		KR 9200736 B	21-01-1992
		MX 161428 A	25-09-1990
		NL 8401656 A,B,	02-01-1985
		NL 9800001 A	01-04-1998
		SE 459631 B	24-07-1989
		SE 8402913 A	02-12-1984
		ZA 8403869 A	30-01-1985